

Refer to product table below for applicable product codes covered by this document

lssue F

Product Type & Application

The Bradford Ventilation TurboBeam is a wind driven ventilator with a clear turbine, designed to remove heat and provide natural light to the roof space or storage area, without the use of electrical energy.

Compliance with the NCC

When correctly specified and installed this natural roof ventilator:

NCC2022

- <u>Ventilation of Roof Spaces</u> Meets the requirements of NCC2022 Volume 1 F8D5 and ABCB Housing Provisions Standard 2022 10.8.3 as a Deemed to Satisfy solution for condensation management for NCC Climate Zones 6, 7 and 8.
- <u>Weatherproofing</u> Meets the requirements of the NCC 2022 Volume 2 Weatherproofing Performance Requirement H2P2 via Deemed-to-Satisfy (DtS) and performance solution pathways.

NCC2019

- <u>Ventilation of Roof Spaces</u> Meets the requirements of the NCC2019 Volume 1 Amend.1 F6.4 and NCC 2019 Volume 2 Amend.1 3.8.7.4 as a Deemed-To-Satisfy solution.
- <u>Weatherproofing</u> Meets the requirements of the NCC 2019 Volume 2 Amend. 1 Weatherproofing Performance Requirement P2.2.2 via Deemed-to-Satisfy (DtS) and performance solution pathways.

Evidence of Suitability

- Ventilation of roof spaces Bradford Ventilation DTS Solution Calculation.
- Weatherproofing Arcadis Report 30051677_4.

Conditions of Storage, Use & Maintenance

- Store in the original packaging in a cool and dry area.
- Do not attempt to repair contact Bradford Ventilation for service advice.

Refer to the product warranty at bradfordventilation.com.au for more information.

Limitations of Use

- **IMPORTANT** Do Not Modify This Product: Compliance with the evidence of suitability data referenced in this document is only achieved by the product or configuration listed in this PTS.
- This product has not been tested for use in cyclonic wind regions C or D.
- Do not use for exhausting hazardous, abrasive, acidic and alkaline vapour or areas containing explosive or corrosive materials.
- This product is not suitable for use in Bush Fire BAL-12.5 to BAL-40 or FZ rated areas.

Specific Design or Installation Instructions

- Isolate power before installation.
- This product requires specific areas to be sealed against water entry and other areas to be left unsealed to allow internal condensation drainage refer to the installation guide for details.
- Installation must be accordance with the Bradford Ventilation Residential Turbine Ventilator Installation Instruction.
- The rotating head of this product must be installed horizontally to ensure correct operation.
- Refer to the tables below for recommended ventilation levels. Note that there are differences between NCC 2019 and NCC 2022.

For general installation guidance refer to the product installation guide at www.bradfordventilation.com.au

Product Technical Statements are referenced as suitable documentary evidence to support the use of a product for a Performance Requirement or a Deemed-to-Satisfy Provision of the BCA under Part A5.2(1)(f) (2019) or A5G3(f) (2022).



Specific Design or Installation Instructions cont.

NCC2022 Ventilation of Roof Spaces Deemed-To-Satisfy Solution Requirements Calculation in Table 1:

The table below indicates the ventilation opening requirements for condensation management in NCC Climate Zones 6, 7 and 8. The NCC gives and open area requirement per meter length of the longest horizontal dimension (e.g., the longest length of gutter) of the roof, the table indicates how many products are required based on this. Ventilation openings should be evenly distributed.

TurboBeam vents should be installed not more than 900mm below the ridge or highest point of the roof space, measured vertically.

Table 1. NCC 2022 Bradford Deemed-To-Satisfy Solution

Products	TurboBeam Roof Ventilator Requirement	Bradford Metal Eave Vent Requirement	Bradford Poly Eave Vent Requirement		
Roof Pitch					
<10°		Install 1 Metal Eave Vent for every 0.7m of	Install 1 Poly Eave Vent for every 0.4m of		
		the longest horizontal roof length. These	the longest horizontal roof length. These		
		must be equally divided between the two	must be equally divided between the two		
		opposing ends of the roof.	opposing ends of the roof.		
≥10° and <15°	1 TurboBeam for every 9.2m of the	1 Metal Eave Vent for every 1.4m of the	1 Poly Eave Vent for every 0.9m of the		
	longest horizontal roof length.	longest horizontal roof length.	longest horizontal roof length.		
≥15° and <75°	1 TurboBeam for every 9.2m of the	1 Metal Eave Vent for every 5.0m of the	1 Poly Eave Vent for every 3.3m of the		
	longest horizontal roof length.	longest horizontal roof length.	longest horizontal roof length.		
≥15° and <75°	1 TurboBeam for every 9.2m of the	1 Metal Eave Vent for every 1.4m of the	1 Poly Eave Vent for every 0.9m of the		
Cathedral	longest horizontal roof length.	longest horizontal roof length.	longest horizontal roof length.		

IMPORTANT APPLICATION NOTE: The number of vents required should be rounded up, not down, to ensure that the ventilation provided meets or exceeds the recommended requirement. For example, the ventilation requirement for a 10° pitched roof 20m long in the longest horizontal direction is calculated as follows:

- The ventilator requirement (1 per 9.2m) is calculated as follows: 20m divided by the recommended TurboBeam spacing of 9.2m = 20/9.2 = 2.2 vents which should be rounded up to 3 TurboBeam Vents, to be evenly distributed along the roof.
- The metal eave vent requirement (1 per 1.4m) is calculated as follows: 20m divided by the recommended metal eave vent spacing of 1.4m = 20/1.4 = 14.2 eave vents which should be rounded up to 16 metal eave vents, evenly distributed around the roof.

NCC2019 Ventilation of Roof Spaces Deemed-To-Satisfy Solution Requirements Calculation in Table 2:

The table below indicates the ventilation opening requirements for condensation management in all NCC Climate Zones when kitchen, bathroom, sanitary compartment or laundry exhaust systems are discharging into the roof space.

- Calculate the area (m²) of ceiling directly under the roof space;
- Determine the pitch of the roof;
- Look up the recommended number of TurboBeam and Bradford Metal Eave vents in the Deemed-To-Satisfy Solution Table below;
- o Distribute the TurboBeam(s) and Bradford Metal Eave Vents evenly.

Table 2. NGC 2019 Diadiora Deemed-10-Satisfy Solution					
Roof Pitch	Total Ceiling Area	Number of	Bradford Metal Eave	Bradford Poly Eave	
	(m²)	TurboBeams required	Vents required	Vents required	
	46	1	4	5	
	92	2	7	10	
	138	3	10	14	
> 22°	184	4	13	19	
	231	5	16	23	
	277	6	19	28	
	323	7	22	32	

Table 2. NCC 2019 Bradford Deemed-To-Satisfy Solution

Total Ceiling Area is defined as the total ceiling area directly under the roof/attic space.

Where the roof pitch is ≤ 22°, the number of ventilators and eave vents specified must be doubled for the same ceiling area.

CSR Bradford Locked Bag 1345 North Ryde BC NSW 1670 csrbradford.com.au

For further technical advice call **1300 850 305** or visit **csrbradford.com.au**

CSR Bradford is a business division of CSR Building Products Limited ABN 55 008 631 356 The contents of this brochure are copyright protected and may not be reproduced in any form without prior written consent of CSR Bradford. Recommendations and advice regarding the use of the products described in this brochure are to be taken as a guide only, and are given without liability on the part of the company or its employees. We reserve the right to change product specifications without prior notification, please refer to the CSR Bradford website for the latest revision of this document. The purchaser should independently determine the suitability of the product for the intended use and application.





Applicable Product Codes (SKU)

CLEAR 61183

Product Specifications

General		Material	
Ventilator Type	Wind Driven Natural Ventilator	Turbine	High Impact Acrylic
Turbine Diameter	327.5 mm	Varipitch	Aluminium
Varipitch Diameter	255.5 mm	Flashing	Aluminium
Minimum Open Area	46215 mm ²	Shaft	Aluminium
Product Weight	1.9 kg	Bearings	Twin Stainless-Steel Bearings
Roof Pitch	Tiled Roofs 15° to 45° Metal Sheet Roofs 3° to 45° Note: Where applicable all roof pitches must comply to AS1562.1, the NCC & Australian Standards		

CSR Bradford Locked Bag 1345 North Ryde BC NSW 1670 csrbradford.com.au


For further technical advice call 1300 850 305 or visit csrbradford.com.au

CSR Bradford is a business division of CSR Building Products Limited ABN 55 008 631 356 The contents of this brochure are copyright protected and may not be reproduced in any form without prior written consent of CSR Bradford. Recommendations and advice regarding the use of the products described in this brochure are to be taken as a guide only, and are given without liability on the part of the company or its employees. We reserve the right to change product specifications without prior notification, please refer to the CSR Bradford website for the latest revision of this document. The purchaser should independently determine the suitability of the product for the intended use and application.





Product Dimensions (in mm)

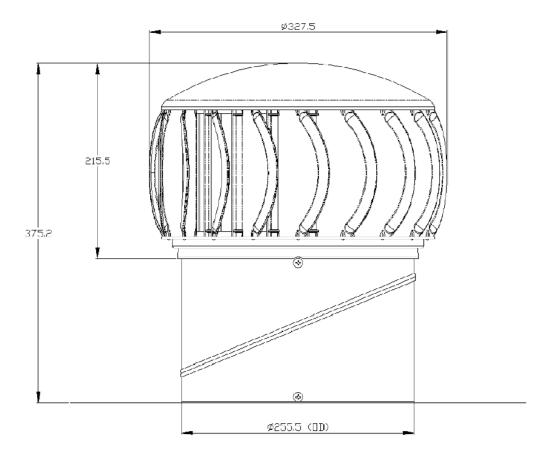

CSR Bradford Locked Bag 1345 North Ryde BC NSW 1670 csrbradford.com.au

For further technical advice call 1300 850 305 or visit csrbradford.com.au

CSR Bradford is a business division of CSR Building Products Limited ABN 55 008 631 356 The contents of this brochure are copyright protected and may not be reproduced in any form without prior written consent of CSR Bradford. Recommendations and advice regarding the use of the products described in this brochure are to be taken as a guide only, and are given without liability on the part of the company or its employees. We reserve the right to change product specifications without prior notification, please refer to the CSR Bradford website for the latest revision of this document. The purchaser should independently determine the suitability of the product for the intended use and application.

